


SP 6

● Performance curve

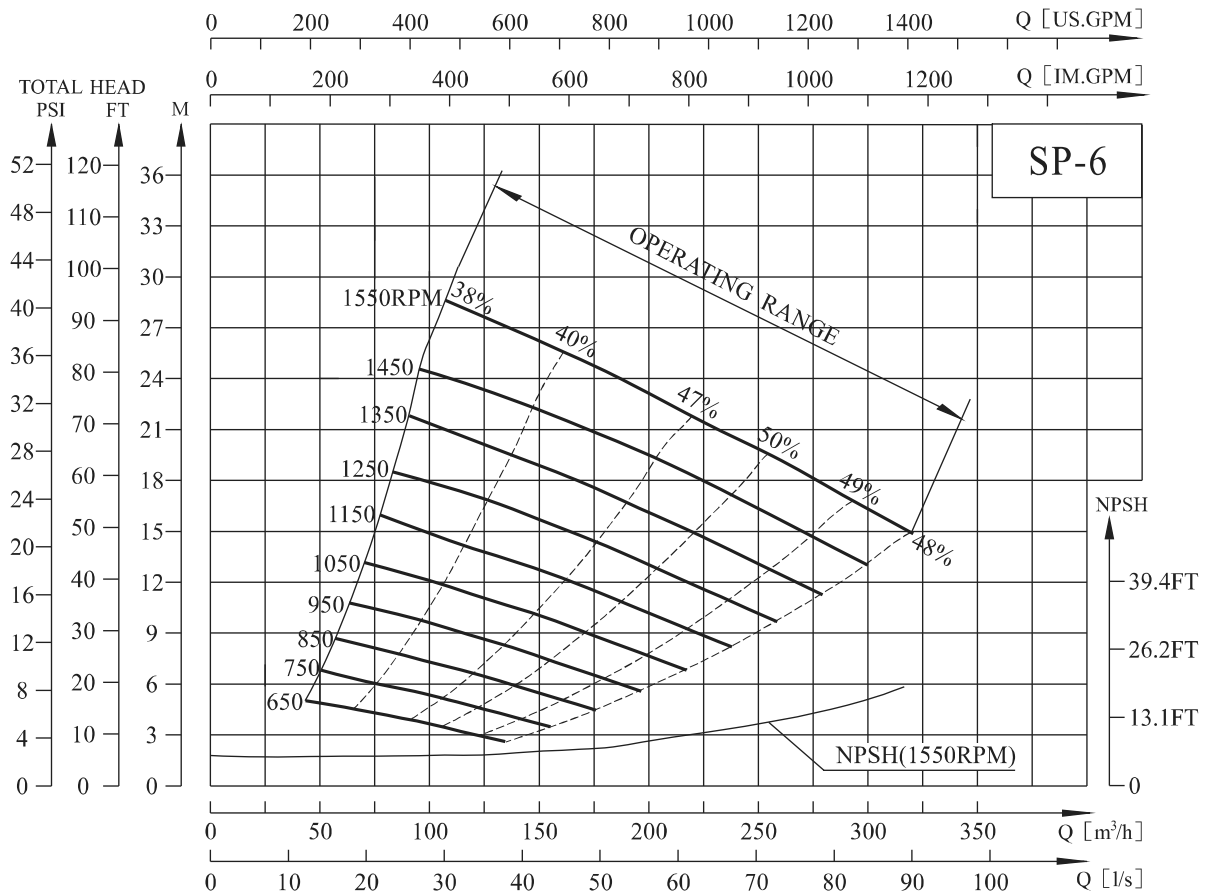

SP 6

● SP-6 Performance Table

Model	RPM	Q		H (m)	Motor		Inlet & Outlet	Max.Solids (mm)	Max.Suction Head (m)
		(m³/h)	(l/s)		(kW)	(HP)			
SP-6	650	100	27.8	3.5	3	4	150 (6')	76	2.4
	750*	125	34.7	4.5	4	5.5			2.7
	850	150	41.7	5.5	7.5	10			3.6
	950*	160	44.4	7.5	7.5	10			4.2
	1050	180	50.0	9.0	11	15			5.5
	1150	200	55.6	10.0	15	20			6.4
	1250	220	61.1	12.5	22	30			6.4
	1350	230	63.9	15.0	30	40			6.7
	1450*	250	69.4	17.0	30	40			7.0
	1550	280	77.8	18.0	37	50			7.6

● SP-6 Operating Table

Model	RPM	Q (m³/h)	50	80	120	150	180	210	240	270	300
SP-6	650	H (m)	5.0	4.2	3.1						
	750*			6.0	4.7	3.6					
	850			8.0	7.0	5.5					
	950*			11.0	9.5	7.5	6.8				
	1050			13.0	11.0	10.0	9.0	7.5			
	1150			16.0	14.0	12.8	11.2	10.0	8.0		
	1250				17.0	15.5	14.0	12.7	10.5		
	1350				20.5	19.0	17.5	15.5	14.0	12.0	
	1450*				24.0	22.0	21.0	19.0	17.0	15.0	13.0
	1550				28.0	26.0	24.5	22.7	20.5	18.5	16.5